


# V1526

CLOSED-CELL PVC FOAM COMPRESSIBLE GLAZING TAPE

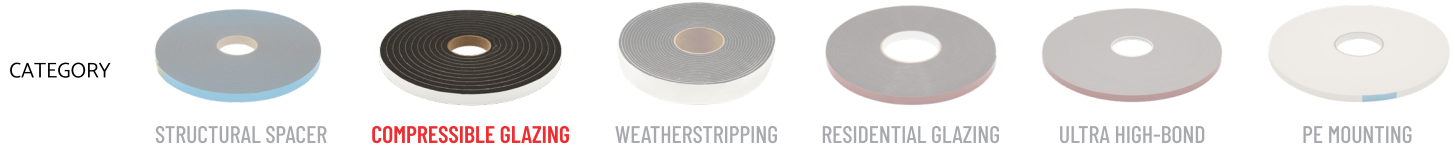

INDUSTRY    AUTOMOTIVE    RECREATIONAL VEHICLES    **GLAZING**    CONSTRUCTION DETAILING    GASKETING    ACOUSTICS    LOG HOME    MOUNTING    PROTECTIVE

## TAPE OVERVIEW

The V1526 Compressible Glazing Tape from Capital Tape is an aggressive, pressure-sensitive tape with adhesive on both sides of a medium-density, closed-cell PVC foam. Products feature an easy release film liner. Tested and approved to AAMA 810.1-92 expanded cellular glazing tapes; these foams are silicone compatible.

- Excellent in glazing applications
- Maintains seal in high movement joints
- Effectively functions as a thermal break and insulator
- Excellent resistance to fungi, oxidation, and weather
- Fire rating: Meets/exceeds FMVSS 302A
- Self-Extinguishing/No Burn Rate



### SCAN FOR MORE

Visit this product page, request samples, or get an online quote.

## TAPE PROPERTIES

The values stated in charts are averages and are not to be construed as a warranty. Products must be tested by end user for application suitability.

|  |                                 |                 |
|--|---------------------------------|-----------------|
| Density  | ASTM D-1667                     | 15 lbs./cu. ft. |
| Hardness (Shore OO)                              | ASTM D-2240                     | 40              |
| Force to Compress (@ 25%)                        | ASTM D-1667                     | 7 PSI/48 kPa    |
| Compression Set (@ 25%)                          | ASTM D-1667                     | 8%              |
| Tensile Strength                                 | ASTM D-412                      | 80 PSI/550 kPa  |
| Water absorption (% by volume)                   | GTP                             | 1.0             |
| Percent Elongation                               | ASTM D-412                      | 160             |
| Thermal Conductivity                             | ASTM C-518                      | 0.30            |
| Recommended Service Temp.<br>12 month shelf life | -30°F to 200°F<br>-35°C to 90°C |                 |
| Recommended Application Temperature              | 50°F to 110°F<br>10°C to 45°C   |                 |
| Fungi resistance                                 | Excellent                       |                 |
| Oxidation resistance                             | Excellent                       |                 |
| Weather resistance                               | Excellent                       |                 |



**WE CUT TAPE.**

Learn more at [capitaltape.com](http://capitaltape.com)