


VK SERIES

CLOSED-CELL PVC FOAM VK SERIES GLAZING TAPE

CapitalTape
A family business, since 1990 

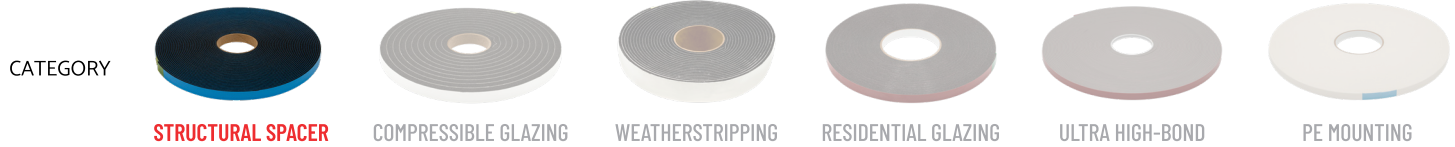

INDUSTRY AUTOMOTIVE RECREATIONAL VEHICLES **GLAZING** CONSTRUCTION DETAILING GASKETING ACOUSTICS LOG HOME MOUNTING PROTECTIVE

TAPE OVERVIEW

A closed-cell PVC foam tape, the VK Series (VK1810/VK1826) Glazing Tape VK Series Tape from Capital Tape is used within curtain wall systems to provide security and a barrier between the glass and frame. Available in black and gray. The VK Series Glazing Tape is very tough, very dense, and virtually invincible which makes it perfect for:

- Curtain wall structural silicone
- Any application that relies on costly, high-density urethane gasketing for spacing, vibration, dampening or cushioning.
- Excellent adhesion to stainless steel, glass, aluminum, painted metal and vinyl.



SCAN FOR MORE

Visit this product page, request samples, or get an online quote.

TAPE PROPERTIES

The values stated in charts are averages and are not to be construed as a warranty. Products must be tested by end user for application suitability.

Density	ASTM D-1667	19 lbs./cu. ft.
Hardness (Shore A)	ASTM D-2240	65
Force to Compress (@ 25%)	ASTM D-1667	15 PSI
Compression Set (@ 10%)	ASTM D-1667	2.5%
Tensile Strength	ASTM D-412	85 PSI
Water absorption (% by volume)	CTP*	2.2
Dynamic Shear	CTP*	60 PSI
Dynamic Tensile	CTP*	35 PSI
Percent Elongation	ASTM D-412	70%
Thermal Conductivity	ASTM C-518	0.30
Recommended Service Temp. 12 month shelf life	-10°F to 200°F -23°C to 100°C	
Recommended Application Temperature	50°F to 110°F 10°C to 45°C	
Fungi resistance	Good	
Oxidation resistance	Good	
Weather resistance	Good	

MEMBER
NGA
NATIONAL GLASS ASSOCIATION

FMVSS 302A
Federal Motor Vehicle Safety
Standard No. 302
CAPITAL TAPE

 **A.A.M.A.**
CERTIFIED 810.1-92

WE CUT TAPE.

Learn more at capitaltape.com

1-888-888-TAPE

service@capitaltape.com

4920 Commerce Parkway #11, Cleveland, OH 44128