


# 5100 SERIES

POLYETHYLENE ACRYLIC ADHESIVE TAPE

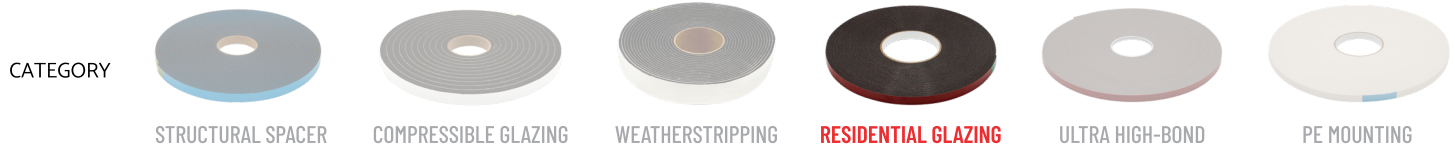

INDUSTRY AUTOMOTIVE RECREATIONAL VEHICLES **GLAZING** CONSTRUCTION DETAILING GASKETING ACOUSTICS LOG HOME **MOUNTING** PROTECTIVE

## TAPE OVERVIEW

The 5100 Series from Capital Tape is the chosen residential glazing tape for long-term, high bonding performance in both indoor and outdoor environments. It's a flexible, polyethylene foam tape, coated on both sides with a high-tack, acrylic adhesive protected by a plastic liner.

- Polyethylene acrylic adhesive
- High-tack, long-term bonding
- Indoor/outdoor applications
- Approved under AAMA 810.1-92
- Exceptional shear & tensile strength
- Ideal for residential glazing



### SCAN FOR MORE

Visit this product page, request samples, or get an online quote.

## TAPE PROPERTIES

The values stated in charts are averages and are not to be construed as a warranty. Products must be tested by end user for application suitability.

Thickness	1/32"	1/8"
Density	4.0 PCF	2.5 PCF
Length	216 ft	75 ft
Loop Tack: FINAT-9	134.04 oz./in.	105.8 oz./in.
Peel Adhesion: PSTC-3	70.55 oz./in	52.9 oz./in.
Shear Strength	Over 24 hrs. with 2.2 lbs. loading on 1in x 1in (1.0 kg/25mm x 25mm) bonding 2 stainless steel plates at 77°F (25°C)	Over 10 hrs. with 35.3 oz loading on 1in x 1in (1.0 kg/25mm x 25mm) bonding 2 stainless steel plates at 77°F (25°C)
Normal Tensile Strength	Over 44 lbs. loading on 1in x 1in (20kgs/25mm x 25mm) bonding 2 stainless steel plates at 176°F (80°C)	Over 22 lbs. loading on 1in x 1in (10kgs/25mm x 25mm) bonding 2 stainless steel plates at 176°F (80°C)
Service Temperature	-10°F to 170°F	-10°F to 170°F



**WE CUT TAPE.**

Learn more at [capitaltape.com](http://capitaltape.com)