


# V1510

CLOSED-CELL PVC FOAM COMPRESSIBLE GLAZING TAPE

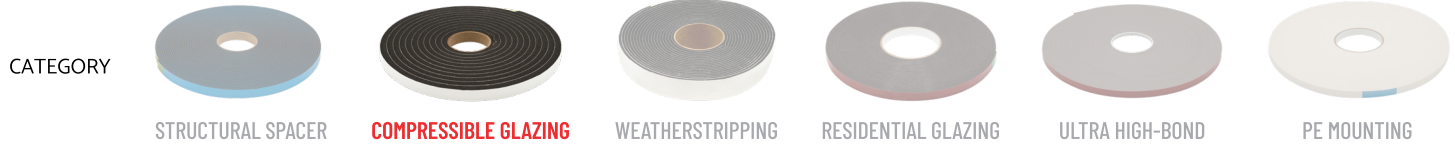

INDUSTRY **AUTOMOTIVE** RECREATIONAL VEHICLES **GLAZING** CONSTRUCTION DETAILING **GASKETING** **ACOUSTICS** LOG HOME MOUNTING PROTECTIVE

## TAPE OVERVIEW

The V1510 provides excellent flexibility and conformability with strength and wear resistance. Performs in tough applications where a tape must still flex to fit and seal. Excellent dimensional stability and a cushion against heavier loads.

- For storefront, architectural glazing
- Excellent dimensional stability and a cushion against heavier loads
- Clean die cuts & fastener penetration
- Withstands wear and abrasion
- Excellent resistance to fungi, weather, and oxidation
- Fire rating: Meets or exceeds FMVSS 302A.
- Self-Extinguishing/No Burn Rate



### SCAN FOR MORE

Visit this product page, request samples, or get an online quote.

## TAPE PROPERTIES

The values stated in charts are averages and are not to be construed as a warranty. Products must be tested by end user for application suitability.

Density	ASTM D-1667	15 lbs./cu. ft.
Hardness (Shore 00)	ASTM D-2240	40
Force to Compress (@ 25%)	ASTM D-1667	7 PSI/48 kPa
Compression Set (@ 25%)	ASTM D-1667	8%
Tensile Strength	ASTM D-412	80 PSI/550 kPa
Water absorption (% by volume)	GTP	1.0
Peel Adhesion	ASTM D-1000	3-4 lbs
Percent Elongation	ASTM D-412	160
Thermal Conductivity	ASTM C-518	0.30
Recommended Service Temp. 12 month shelf life	-30°F to 200°F -35°C to 90°C	
Recommended Application Temperature	50°F to 110°F 10°C to 45°C	
Fungi resistance	Excellent	
Oxidation resistance	Excellent	
Weather resistance	Excellent	



**WE CUT TAPE.**

Learn more at [capitaltape.com](http://capitaltape.com)