


V1526

CLOSED-CELL PVC FOAM COMPRESSIBLE GLAZING TAPE

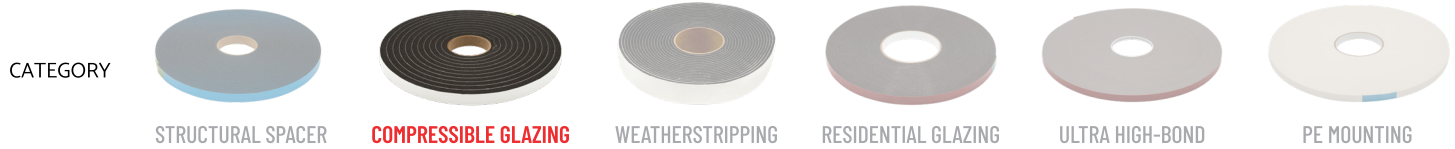

INDUSTRY **AUTOMOTIVE** RECREATIONAL VEHICLES **GLAZING** CONSTRUCTION DETAILING **GASKETING** ACOUSTICS LOG HOME MOUNTING PROTECTIVE

TAPE OVERVIEW

The V1526 Compressible Glazing Tape from Capital Tape is an aggressive, pressure-sensitive tape with adhesive on both sides of a medium-density, closed-cell PVC foam. Products feature an easy release film liner. Tested and approved to AAMA 810.1-92 expanded cellular glazing tapes; these foams are silicone compatible.

- Excellent in glazing applications
- Maintains seal in high movement joints
- Effectively functions as a thermal break and insulator
- Excellent resistance to fungi, oxidation, and weather
- Fire rating: Meets/exceeds FMVSS 302A
- Self-Extinguishing/No Burn Rate



SCAN FOR MORE

Visit this product page, request samples, or get an online quote.

TAPE PROPERTIES

The values stated in charts are averages and are not to be construed as a warranty. Products must be tested by end user for application suitability.

Density	ASTM D-1667	15 lbs./cu. ft.
Hardness (Shore OO)	ASTM D-2240	40
Force to Compress (@ 25%)	ASTM D-1667	7 PSI/48 kPa
Compression Set (@ 25%)	ASTM D-1667	8%
Tensile Strength	ASTM D-412	80 PSI/550 kPa
Water absorption (% by volume)	GTP	1.0
Percent Elongation	ASTM D-412	160
Thermal Conductivity	ASTM C-518	0.30
Recommended Service Temp. 12 month shelf life	-30°F to 200°F -35°C to 90°C	
Recommended Application Temperature	50°F to 110°F 10°C to 45°C	
Fungi resistance	Excellent	
Oxidation resistance	Excellent	
Weather resistance	Excellent	



WE CUT TAPE.

Learn more at capitaltape.com