


4400 SERIES

ULTRA-HIGH BOND TAPE

CapitalTape
A family business, since 1990 

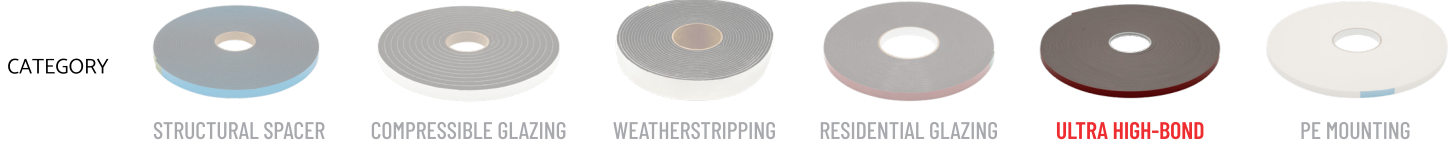

INDUSTRY **AUTOMOTIVE** RECREATIONAL VEHICLES GLAZING CONSTRUCTION DETAILING GASKETING ACOUSTICS LOG HOME MOUNTING PROTECTIVE

TAPE OVERVIEW

The 4400 Series is a translucent, structural-grade, ultra-high bond acrylic tape designed to provide superior bond between a wide variety of surfaces. The tape combines a high tack acrylic adhesive on both surfaces with a core of solid acrylic polymer.

- Long life high bond strength
- Solid acrylic core
- Flexible & compressible, conforms to intricate shapes
- Will not absorb moisture
- Maintains adhesion at -0° temps
- Instant pressure sensitive bonding
- Will not harden or brittle with age
- Excellent weathering properties
- Non-staining
- Isolates and dampens vibration, shock



SCAN FOR MORE
Visit this product page, request samples, or get an online quote.

TAPE PROPERTIES

The values stated in charts are averages and are not to be construed as a warranty. Products must be tested by end user for application suitability.

Tensile Strength	ASTM D412	200 PSI
Elongation	ASTM D412	500%
Peel Adhesion	ASTM D-3330	5.2 N/mm
Dynamic Shear Strength	ASTM D-3163	620 kPa
Chemical Resistance (Cleavage Peel)	15.1 N/mm	3 Days @ RT
FLTM BU 112-02 Method C	12.9 N/mm	Unleaded Gasoline – 1 hr.
	10.5 N/mm	Diesel Fuel – 1 hr.
	10.9 N/mm	Water Immersion – 240 hrs.
Recommended Service Temp.	-30°F to 200°F	
Recommended Application Temperature	50°F to 100°F	
Meets Requirements for:	Chrysler – MS-12194 Type C	Ford – WSB-M3G138-B
	GM – GM3802M Type XIV	Mazda – MES PA 50680
	Mitsubishi – ES-X61165	Nissan – M8506 (1999-N)



WE CUT TAPE. Learn more at capitaltape.com