


# 5200 SERIES

POLYETHYLENE ACRYLIC ADHESIVE TAPE

**CapitalTape**  
A family business, since 1990 

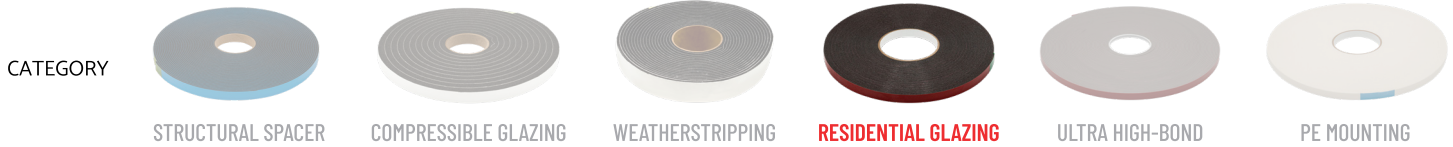

INDUSTRY AUTOMOTIVE RECREATIONAL VEHICLES **GLAZING** CONSTRUCTION DETAILING GASKETING ACOUSTICS LOG HOME **MOUNTING** PROTECTIVE

## TAPE OVERVIEW

the 5200 residential glazing tape from Capital Tape is a flexible, polyethylene foam tape, coated on both sides with a high-tack, acrylic adhesive that is protected by a plastic liner. It is ideal for long-term, high bonding performance in both indoor and outdoor environments.

- Polyethylene acrylic adhesive
- High-tack, long-term bonding
- Indoor/outdoor applications
- Approved under AAMA 810.1-92
- Exceptional shear & tensile strength
- Ideal for residential glazing

## TAPE PROPERTIES

The values stated in charts are averages and are not to be construed as a warranty. Products must be tested by end user for application suitability.

Thickness	1/16"
Density	4.0 PCF
Length	300 ft
Loop Tack: FINAT-9	176.4 oz./in.
Peel Adhesion: PSTC-3	123.5 oz./in.
Shear Strength	Over 24 hrs. with 35.3 lbs. loading on 1in x 1in (1.0 kg/25mm x 25mm) bonding 2 stainless steel plates at 77°F (25°C)
Normal Tensile Strength	Over 44 lbs. loading on 1in x 1in (20kgs/25mm x 25mm) bonding 2 stainless steel plates at 176°F (80°C)
Service Temperature	-10°F to 170°F



### SCAN FOR MORE

Visit this product page, request samples, or get an online quote.

MEMBER  
**NGA**  
NATIONAL GLASS ASSOCIATION

**FMVSS 302A**  
Federal Motor Vehicle Safety  
Standard No. 302  
CAPITAL TAPE

 **A.A.M.A.**  
CERTIFIED  
810.1-16 Type I

**WE CUT TAPE.**

Learn more at [capitaltape.com](http://capitaltape.com)

1-888-888-TAPE

service@capitaltape.com

4920 Commerce Parkway #11, Cleveland, OH 44128