


9226

RUBBER ADHESIVE POLYETHYLENE MOUNTING TAPE

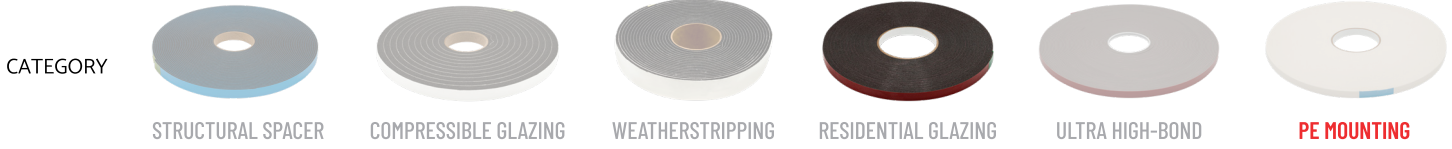

INDUSTRY AUTOMOTIVE RECREATIONAL VEHICLES GLAZING CONSTRUCTION DETAILING GASKETING ACOUSTICS LOG HOME **MOUNTING** PROTECTIVE

TAPE OVERVIEW

This 1/16” thick polyethylene closed-cell foam has a high shear strength and good initial tack. It’s coated on both sides with a permanent rubber-based adhesive. Available in white or black.

- Ideal for mounting and joining
- Ideal for sealing applications
- Great for indoor bonding
- Very high shear strength
- Good initial tack

TAPE PROPERTIES

The values stated in charts are averages and are not to be construed as a warranty. Products must be tested by end user for application suitability.

| | |
|----------------------------|---|
| Thickness | 1/16” |
| Density | 4.0 PCF |
| Tack | J. Dow No. 7 |
| Peel Adhesion | 113 oz/in PSTC-3 |
| Shear Strength | Over 100 hrs. with 70.6 oz loading on 1” x 1” bonding 2 stainless steel plates at 77°F PSTC-9 |
| Service Temperature | White 14°F to 122°F Black 14°F to 140°F |



SCAN FOR MORE

Visit this product page, request samples, or get an online quote.



WE CUT TAPE.

Learn more at capitaltape.com