


9228

RUBBER ADHESIVE POLYETHYLENE MOUNTING TAPE

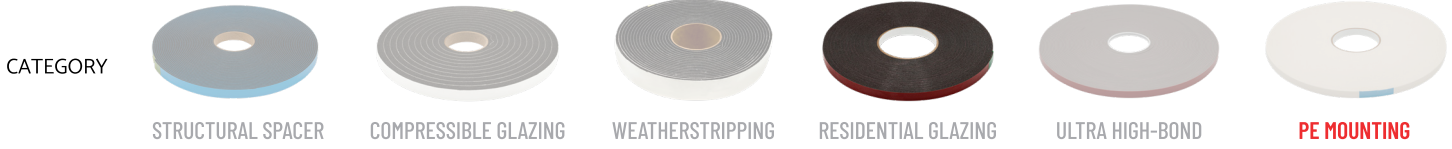

INDUSTRY AUTOMOTIVE RECREATIONAL VEHICLES GLAZING CONSTRUCTION DETAILING GASKETING ACOUSTICS LOG HOME **MOUNTING** PROTECTIVE

TAPE OVERVIEW

The 9228 Polyethylene Mounting Tape from Capital Tape is a closed-cell polyethylene foam designed for tear-resistance and easy removal. It's a 1/8" thick polyethylene closed-cell foam coated both sides with a permanent rubber-based adhesive. Available in white or black.

- Protected by a durable, polycoated densified kraft liner
- Liner specifically designed for tear resistance and easy removal

TAPE PROPERTIES

The values stated in charts are averages and are not to be construed as a warranty. Products must be tested by end user for application suitability.

Loop Tack (Stainless Steel)	PSTC-16-Method A	12.0/12.0 lbs/in
Peel Adhesion 1 mil. PET Backed (30 min. dwell - stainless steel)	PSTC-101-Method A	12.0/12.0 lbs/in
Tensile (MD/CD)	ASTM-D882	145/105 lbs/in
Elongation (MD/CD)	ASTM-D882	339/308% lbs/in
Shear Resistance - 1 kg	PSTC-107-Method A	75+ hrs to fail
Application Temperature		50° F to 150°F
Service Temperature Use		0°F to 180°F



SCAN FOR MORE

Visit this product page, request samples, or get an online quote.



WE CUT TAPE.

Learn more at capitaltape.com