


9230EZ

WEATHER RESISTANT POLYETHYLENE MOUNTING TAPE

CapitalTape
A family business, since 1990 

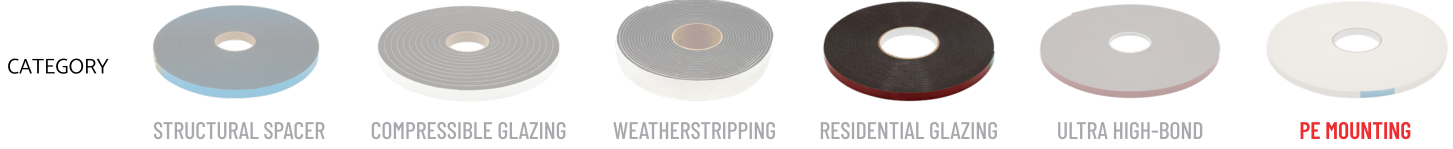

INDUSTRY AUTOMOTIVE RECREATIONAL VEHICLES GLAZING CONSTRUCTION DETAILING GASKETING ACOUSTICS LOG HOME **MOUNTING** PROTECTIVE

TAPE OVERVIEW

The 9230EZ Polyethylene Mounting Tape is a high-performance, high-resistance tape that is ideal for outdoor and automotive uses. High performing solvent-based acrylic adhesive system coated on each side of a black foam carrier and protected by an “easy release” green PE liner. This product has very high shear strength and is highly resistant to solvents, chemicals, UV and heat.

- Excellent weather and age resistance
- Perfect for mounting of mirror tiles and labels
- Ideal for aftermarket automotive applications like car side moldings
- UV and heat resistant
- Excellent for outdoor applications
- Shelf life of up to 2 years

TAPE PROPERTIES

The values stated in charts are averages and are not to be construed as a warranty. Products must be tested by end user for application suitability.

Thickness	0.030" / 30 mil
Tensile Strength	Over 99 lbs / 25 mm x 25 mm
Peel Adhesion	1.4 kg/25 mm PSTC-3
Shear Strength	Over 24 hrs with 35.3 oz loading on 1" x 1" (1.0 kg/25mm x 25mm) bonding 2 stainless steel plates at 77°F (25°C)
Heat Resistance	Over 24 hrs with 17.6 oz loading on 1" x 1" (0.5 kg/25mm x 25mm) bonding 2 stainless steel plates at 176°F (80°C)
Service Temperature	-40°F - 248°F (-40°C ~ 120°C)
Optimum Storage	72°F (22°C) and 50% relative humidity
Shelf Life	2 years



SCAN FOR MORE

Visit this product page, request samples, or get an online quote.



WE CUT TAPE.

Learn more at capitaltape.com