


9241

WEATHER RESISTANT POLYETHYLENE MOUNTING TAPE

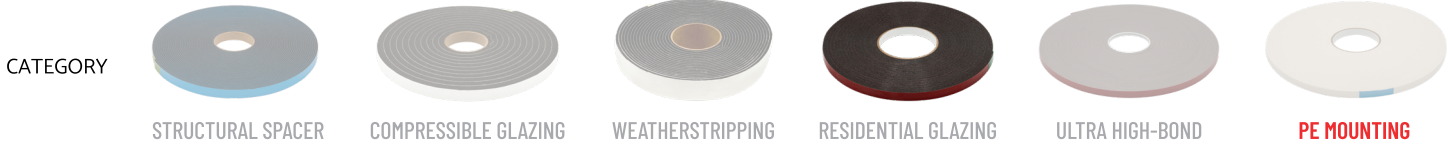

INDUSTRY AUTOMOTIVE RECREATIONAL VEHICLES GLAZING CONSTRUCTION DETAILING GASKETING ACOUSTICS LOG HOME **MOUNTING** PROTECTIVE

TAPE OVERVIEW

The 9241 Polyethylene Mounting Tape is a high-performance, solvent-based acrylic, with high resistance to just about any indoor or outdoor foreign threat. The 9241 tape is coated on each side of a cross-linked, black polyethylene foam carrier and protected by a red plastic liner.

- High shear strength
- Highly resistant to solvents
- Highly resistant to chemicals
- Highly resistant to UV and heat
- Excellent for outdoor applications
- Shelf life of up to 2 years

TAPE PROPERTIES

The values stated in charts are averages and are not to be construed as a warranty. Products must be tested by end user for application suitability.

Thickness	0.040" / 40 mil
Loop Tack	140.8 oz. / 25mm FINAT-9
Tensile Strength	Over 44 lb/1" x 1" (20kg/25mm x 25mm)
Peel Adhesion	65.1 oz/in PSTC-3
Shear Strength	Over 24 hrs with 35.2 oz loading on 1" x 1" (1.0 kg/25mm x 25mm) bonding 2 stainless steel plates at 77°F (25°C)
Heat Resistance	Over 24 hrs with 17.6 oz loading on 1" x 1" (0.5 kg/25mm x 25mm) bonding 2 stainless steel plates at 176°F (80°C)
Service Temperature	-4°F ~ 194°F (-20°C ~ 90°C)
Optimum Storage	72°F (22°C) and 50% relative humidity
Shelf Life	2 years



SCAN FOR MORE

Visit this product page, request samples, or get an online quote.



WE CUT TAPE. Learn more at capitaltape.com